

Non-PF-Series

HM-30

- Constant Voltage Power Supplies
- AC Input Voltage Range : 200~240VAC 60Hz
- IP65 For Outdoor Installations
- Protections : SCP, OCP, OTP
- Safety : K61347-1, K61347--2-13, K62384 compliant
- EMI : EN55015, EN61000-3-2, -4-2~8, -4-11 ,K00015 compliant



KC No. : JH11522-14005



Input Specifications

parameter	Conditions/Description	Min	Nor	Max	Units
Input Voltage Range	220VAC Input	200	220	240	VAC
Input Frequency Range			60		Hz
Input Current	30W Input		0.34		A
Inrush Current	At 220VAC VAC input, 25°C Cold start			20	A


Output Specifications

parameter	Conditions/Description	12V		Units
Output Current	Full load	2.2		Ampere
Voltage Accuracy	% of Vout	±5		%
Line Regulation	220Vac Full load	±2		%
Load Regulation	220Vac Full load	±2		%
Turn-on Delay	Measured at 220VAC and full load	2		s
Short Circuit Protection	Output shut down with auto-recovery			

General Specifications

parameter	Conditions/Description	Min	Nor	Max	Units
Withstand Voltage	Input to Case(10mA, 1Minute)		2,000		VAC
Efficiency(Typical)	See individual models		86.0		%
Life time	Load 80% at 30°C		32,000		Hours
Weight			1,170		g
Operating Temperature		-20		+ 40	°C
Storage Temperature		-30		+ 50	°C
Relative Humidity	Non-condensing (operating)	10		90	%RH
Power Derating	At 220VAC, derates linearly from 100% at 30°C to 80% at 40°C				

DIMENSIONS

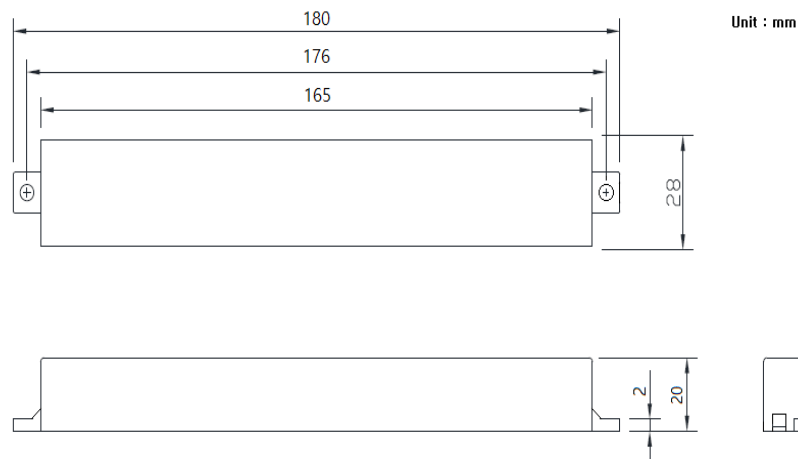

INPUT / OUTPUT WIRING

INPUT CABLE : VCTF 0.75mm² 3C / Black(N) and White(L), 200±20mm

OUTPUT CABLE : VCTF 1.0mm² 2C*3series / Rad(+V) and Black(-V) , 200±20mm